

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 802 661 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: 22.10.1997 Bulletin 1997/43

(51) Int Cl.⁶: H04M 3/38, H04Q 3/72, H04M 3/50, H04Q 11/04

(21) Application number: 97302401.1

(22) Date of filing: 08.04.1997

(84) Designated Contracting States: DE FR GB IT

• Netravalli, Arun N. Westfield, NJ 07090 (US)

(30) Priority: 16.04.1996 US 632860

(74) Representative: Watts, Christopher Malcolm Kelway, Dr. et al Lucent Technologies (UK) Ltd, 5 Mornington Road Woodford Green Essex, IG8 0TU (GB)


(71) Applicant: LUCENT TECHNOLOGIES INC. Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors: • La Porta, Thomas F. New York, NY 10014 (US)

(54) Interactive call identification

(57) A method and apparatus for interactive call identification of a call to a called party. Identifying messages, either text and voice, can be entered on a call-by call basis by the calling party to provide information regarding the call to enable the called party to screen the incoming call. Such identifying messages can include descriptive information about the identity of the caller, the subject matter of the call or any other user-user information. The identifying message is transmitted in the form of a real-time message sent by the caller and received by the party being called in advance of their accepting the call. The identifying message is created on a call-by-call basis by the calling party. The called party receives the identifying message and, after receiving the message, the called party can accept, forward or reject the incoming call based on the information provided in the identifying message. The calling party has the option of using either real-time or pro-recorded message functions. The calling party can select, via a pre-determined access code, to enter a personal message (voice or text) directly from the location from which the call is being placed after dialing the desired number. Interactive call identification can be initiated either by the called or calling party.

FIG. 4

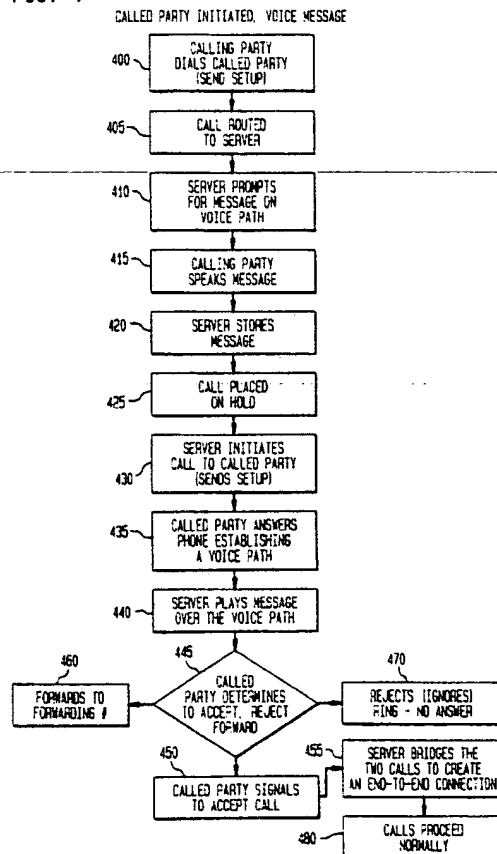

EP 0 802 661 A2

BEST AVAILABLE COPY

Description**Technical Field**

This invention relates generally to telecommunications systems, and more particularly, to a method and apparatus for implementing interactive call identification to facilitate caller identification.

Related Background Art

Prior to picking up the handset on a ringing telephone, thereby accepting an incoming call, it is increasingly desirable for a call recipient to have access to certain information about that incoming call prior to accepting the call. Having access to this information will aid the call recipient in screening the incoming call to decide whether or not to accept it.

Various call identification methods are currently available which provide selected information to the call recipient regarding the incoming call to aid him or her in identifying that incoming call.

These known call identification methods include features to display call information to the call recipient by sending and displaying a data message to the called station. These methods however, are inherently limited in the scope of information they are capable of conveying to the screening call recipient.

The call information (i.e., the data message) provided in these known call identification methods consists of, or at best is derived from, the phone number of the station from which the caller is placing the call, providing little more information than the calling station number to the called party. The nature or purpose (i.e., subject matter) of the call or any other information, is left to be discovered by the called party only after accepting the call.

These known methods typically identify the number of the station from which the calling party is placing the call from a unique code associated with that station from which the call is placed. Where the subscribing call recipient has installed the necessary hardware (i.e., digital display of some type or an ISDN station), the station number from where the calling party is placing the call will be displayed. Where the call recipient has a conventional analog station, these identification services are unavailable without additional equipment. Further, the calling number will be available to the called party only where the calling party has not blocked the information.

Since a called party will typically only have a few of the more frequently used numbers committed to memory, a method of merely displaying the calling station number is of limited utility.

Related methods will also display the caller's name, derived from the calling station number, or other limited data messages. While these methods are potentially more helpful to the call recipient in deciding whether to take a call, they still suffers from the inherent limitation that any information provided to the called party is by

necessity tied to the phone station from which the call is placed.

A call-announcement method is also available for call identification.

In the call announcement scheme, a text-to-speech converter generates speech signals from text retrieved from a database, for transmission to the called station. The database contains information associated with the calling party's number, specifically, the calling party's name. After answering the call, a subscribing call recipient will receive synthesized, spoken information consisting of the calling party's name and/or number. This service is made available to customers having conventional analog or ISDN equipment.

A related development in call identification is that the call recipient who subscribes to the call announcement service can also make a personalized list, resident in the subscribing party's station equipment or central office, where the phone number of frequent callers is correlated to an identifying message, either recorded voice or text, entered by the subscriber. However, the calling party must have an entry in the called party's database corresponding to the number from which the calling party is calling in order for their call to be meaningfully announced to the called party. Where there is no corresponding entry on the list, an incoming call may remain unidentified or may be mis-identified.

Also, as is common to the previously mentioned call identification methods, where a known and welcome caller is calling from someone else's phone or is identified as an 'unlisted caller' because he is calling from an unknown (such as a payphone) or blocked number, a call from an otherwise welcome caller may go unanswered due to the lack of or improper identification.

As has been illustrated, an inherent limitation in these known methods is that identification of a calling party is constricted to the station from which the call is being placed, providing little, if any, information beyond the calling station number. This is of limited value if someone with whom the recipient wishes to speak is calling from an unfamiliar telephone. With the known call identification methods, the call recipient would in this case see an unfamiliar telephone number as identifying the incoming call and have no further information upon which to decide whether or not the call should be accepted. Even the slightly more sophisticated call-announcement method gives little more pre-answer information to the call recipient as it is still tied to the station number from which the incoming call is placed and any possible messages to be retrieved can, practically speaking, only be generic in nature (i.e., "This is Bob.")

In any event, the nature or subject of the call will remain unknown to the recipient until he or she actually takes the incoming call.

Thus, to illustrate, with the known methods, calling party 'A' cannot be properly identified to the called party as 'A' unless 'A' is placing the call from a phone or station having a directory number associated with 'A'. If 'A' plac-

es the call from a station assigned to party 'B', party 'A' will be mis-identified to the call recipient as party 'B'.

Other known messaging methods which allow a caller to send a voice message to a called party are restricted by other limitations. Although providing capabilities of custom message recording, a separate call is required during which the message is created. The message is then delivered at a scheduled delivery time to a recipient party.

As is evident from the foregoing, limitations in known methods limit the effectiveness, and therefore the utility, of the current level of advancement achieved in the area of call identification.

Summary Of The Invention

Limitations of known call identification and announcement methods are resolved and technical advances are achieved in the present invention by a method and system for interactively identifying a telephone call on a communication network as part of call establishment procedure.

A telephone call is terminated in a first telephone connection from a calling location. A message is received from the calling location. This message is then stored. The message is then relayed over a second telephone connection to the called location. The telephone call is then processed based on an input from the called location.

Alternatively, the first connection can be placed on hold prior to relaying the message, while the second connection is established. The method and system can include prompting the calling party to enter a message.

The message transfer can be initiated by either the calling or called party, via subscription or via activation by the calling party entering special activation codes when placing the call.

The processing of the telephone call can include bridging the telephone connection immediately, forwarding the call to a forwarding location, accommodation for call waiting, and rejecting the call where a message can be sent back to the calling party and the call can then be released.

The method and system of the present invention can be implemented on an Integrated Services Digital Network; a broad band signalling Integrated Services Digital Network; a packet network or a POTS network utilizing DTMF signals.

The messaging transfer can be implemented on a network server, an originating switch, an intermediate switch, or a terminating switch.

The method and system are capable of supporting both voice and text messages which can be entered on a call-by-call, or real-time basis. The text messages may be entered via a keyboard or personal computer. The text message may also be pre-stored and/or selectable and/or expandable. The text message may also be converted into audio.

Brief Description Of Drawings

The following drawings are referenced in the detailed description which follows and are provided to facilitate a better understanding of the invention disclosed herein.

Figure 1 illustrates a typical communication path for an end-to-end call from a calling party to a called party.

Figure 2 illustrates typical ISDN signalling flow for the completed end-to-end call of Figure 1.

Figure 3 illustrates a communication path of the present invention as routed through a special server and intermediate central office switches.

Figure 4 illustrates the ISDN processing flow for an implementation of the present invention according to one embodiment of the present invention initiated by the called party for voice messaging.

Figure 5 illustrates the message flow for the processing flow of Figure 4.

Figure 6 illustrates the ISDN processing flow for an implementation of the present invention according to one embodiment initiated by the called party for text messaging.

Figure 7 illustrates the message flow for the processing flow of Figure 6.

Figure 8 illustrates the ISDN processing flow for an implementation of the present invention according to one embodiment initiated by the calling party.

Figure 9 illustrates the message flow for the processing flow of Figure 8.

Figure 10 illustrates the processing flow for the server function element processing a voice message according to the present invention.

Figure 11 illustrates the processing flow for the server function element processing a text message according to the present invention.

Detailed Description Of The Preferred Embodiments

Referring to Figure 1, when a calling party 100 places a call to a called party 200, current technology establishes a connection between these two end-users. This is achieved by the signalling system. The signalling system attempts to confirm a clear line via a specific route from the calling party 100 to originating switch 110 through the central office 300, to the appropriate terminating switch 210, finally to the called party 200. The route is established by the signalling system via connections through the various required paths until the line is complete from end-to-end.

With reference to Figure 2, the standard procedure of determining a clear line connection involves what can be summarized as a three stage process. First, the calling party station 100 must establish a connection to its originating switch 110; second, the originating switch 110 must then establish connection to the destination or terminating switch 210, via any intermediate devices (for illustrative purposes, the described embodiments of the

present invention assume that the calling and called parties are served by different switches, however, the principles of the present invention are equally applicable where both the calling and called parties are served by the same switch, i.e., originating and terminating switches are the same); and, finally, the terminating switch **210** must establish a connection to the called party station **200**. When all stages of the connection process are completed a clear line is established between calling **100** and called **200** party stations.

Once the clear line is thus established, the called party **200**, by picking up the handset of his ringing telephone, accepts the call and the originating switch **110** completes the connection between the calling and called stations, and end-to-end communication (between calling and called stations) may then begin.

Figure 3 illustrates a communication path for an end-to-end call from a calling party **100** to a called party **200** according to one exemplary embodiment of the present invention.

In the present invention, information concerning the identity of the caller, subject matter of the call or any other user-user information (UUI*), is sent by the caller **100** and is received by the called party **200** in advance of the called party **200** answering the call as part of the call set-up. The UUI information of the present invention is provided in the form of a voice or text message which is created interactively on a call-by-call basis by the calling party upon initiating the call. The message can be entered by the calling party on a real-time basis or generated from messages pre-stored on a database.

Referring to Figure 3, an end-to-end communication path is established between a calling party **100** and a called party **200**. The signalling system attempts to confirm a clear line via a specific route from the calling party **100** to originating switch **110** through the central office **300**, which in this embodiment may include central office intermediate switches **115** and special network server **120**, to the appropriate terminating switch **210**, finally to the called party **200**. The route is established by the signalling system via connection through the various required paths until the line is complete from end-to-end.

Either the calling or called party can initiate message transfer according to the present invention.

One embodiment of the present invention is implemented where the called party **200** subscribes to the message transfer service of the present invention and is thus the initiator of the message transfer service. When a call is placed to the called party **200**, the call is routed to a special server **120** which terminates the call. Therefore, the called party number dialed by the calling party is an "alias" which instructs the network to route the call to the special server **120**. The special server **120** then prompts the calling party **100** for their message. Once their message has been accepted, the special server **120** places the call on hold, and initiates a second call to the called party **200**, over which it delivers the voice or text message as will be explained. If the called

party **200** accepts the call, the special server **120** bridges the two calls, the connection is completed and communication can begin. Alternatively, the called party **200** may forward the call, where the special server **120** completes the call to the forwarding point, and then bridges the connections. Finally, in the system default, the called party **200** does not answer the call, and the special server **120** generates a ring-back to the calling party **100** which will experience a "ring-no-answer" condition and eventually hang up.

Figure 4 illustrates the Integrated Services Digital Network ("ISDN") processing flow for a special server based implementation in one exemplary embodiment of the present invention. In this embodiment, message transfer is initiated by a subscribing called party. Illustrated in Figure 4 is a voice message sent from a calling party **100** to a subscribing called party **200**, where the call is accepted by the called party **200**. Figure 5 presents detailed message flow for the processing flow illustrated in Figure 4, depicting this embodiment of the present invention in a condition where the called party accepts the incoming call.

Referring to Figure 4, in step **400**, a SETUP message is generated from the calling party to originating switch when the calling party dials the called party's number. This SETUP message contains the alias for the called party number ("called #") which instructs the originating switch, in step **405**, to route the call to a special server **120** using standard ISDN procedures. The special server, in step **410**, prompts the calling party to enter a message over the established connection. In step **415**, the calling party enters the desired message, in this example a voice message, by speaking into the telephone handset. This voice message is stored in the special server in step **420** and the call between the calling party and the special server is placed on hold in step **425**. The special server **120** then initiates a call to the called party using standard ISDN procedures in step **430** to establish a voice path to the called party. After the voice path is established to the called party in step **435** (for example, either a speakerphone is activated or the receiver is picked up on a conventional telephone), the special server plays the voice message over the newly established voice path in step **440**. The called party, then decides in step **445** whether to accept the call based on the content of the message, enters a code to either accept the call, forward the call, or reject (i.e., ignore) the call. If the called party accepts the call in step **450**, the special server will bridge the two calls to create an end-to-end connection in step **455** and the call can proceed normally in step **480**. If the called party forwards the call in step **460**, the special server will forward the call to the forwarding number according to standard procedures and the call can proceed normally in step **480**. If the called party rejects or ignores the call in step **470**, a "ring-no answer" is encountered by the calling party and the call proceeds normally in step **480** where a "ring-no answer" is experienced by the calling party **100** until the

calling party hangs up.

Referring now to Figure 5, a SETUP message is generated over signaling links from the calling party 100 to originating switch 110 when the calling party dials the called party's number. (See 400, Fig. 4.) This SETUP message contains an alias for the called party number ("called #") which instructs the originating switch 110 to route the call to a special server 120, via any central office intermediate switches 115. (See 405, Fig. 4.) Using standard ISDN procedures, the call is completed to the special server 120. The special server 120 prompts the calling party 100 to enter a message, voice or text, over the established connection. (See 410, Fig. 4.) In this example, the calling party 100 enters a voice message by speaking the message into the telephone handset. (See 415, Fig. 4.) This voice message is stored in the special server 120 (See 420, Fig. 4.) and the call between the calling party 100 and the special server 120 is placed on hold. (See 425, Fig. 4.) The special server 120 then initiates a call via any central office intermediate switches 115 and terminating switch 210 to the called party 200 using standard ISDN procedures. (See 430, Fig. 4.) After the called party 200 answers the call (See 435, Fig. 4.), as is indicated by the CONNECT message sent over signalling links from the called party 200 to its terminating switch 210 through to special server 120, the special server 120 plays the voice message over the newly established connection. (See 440 Fig. 4.) The special server 120 also prompts 230 the called party 200 to enter a code to either accept the call, forward the call, or reject (i.e., ignore) the call. In the example implementation illustrated in Figure 5, the called party 200 signals to accept the call. At this time, the special server 120 bridges the connections between the calling party 100 and called party 200 and the call is established end-to-end (100 to 200). (See steps 445, 450, 455 Fig. 4.) The call now proceeds normally. (See 480 Fig. 4.)

Figure 6 illustrates the ISDN processing flow for a special server based implementation in another exemplary embodiment of the present invention. In this embodiment, message transfer is initiated by a subscribing called party. Illustrated in Figure 6 is a text message is sent from the calling party 100 to the subscribing called party 200, where the call is accepted by the called party 200. Figure 7 presents detailed message flow for the processing flow illustrated in Figure 6, depicting this embodiment of the present invention in a condition where the called party 200 accepts the incoming call.

Referring to Figure 6, in step 500, a SETUP message is generated over signaling links from the calling party 100 to the originating switch 110 as in the implementation example of Figures 4 and 5. Again, using standard ISDN procedures, the call is completed to a special server 120 in step 505. The special server 120 prompts the calling party 100 to enter a text message over the established connection in step 510. (Again, the calling party can select either a voice or text message,

but for this exemplary embodiment, a text message was chosen for illustrative purposes.) In step 515, the calling party either enters the text message using a keyboard (via, for example, a personal computer with a modem), or enters a code for a message that is pre-stored in its phone. Where a code for a pre-stored message is chosen, the telephone expands the message code into a full textual message using known methods. The text message is then stored in the special server 120 in step 520 and the call between the calling party and the special server 120 is placed on hold in step 525. The special server 120 then initiates a call to the called party in step 530, using standard ISDN procedures, and sends the text message for display to called party 200.

In step 531, an option is selected to either "wait" or "bridge" the call.

If the "bridge" option is chosen, the call is bridged immediately in step 535. When the called party accepts the call, as in this example, process flow continues in step 535 where the special server will bridge the two calls to create an end-to-end connection in step and the call can proceed normally in step 550.

If the "wait" option is chosen, the call will not be bridged, forwarded or released until a user response from the called party has been received. In step 532, the called party sends instructions and the flow continues to step 540.

In step 540, the server function element resolves, based on input from the called party, to either accept the call (step 542), or not (step 541). Where the called party has accepted the call (542), the server function element will bridge the call (either connect or forward) in step 544. Where the called party has not accepted the call (541), the server function element will either, at the choice of the called party, do nothing and "Ring Back" (i.e., allow a "ring no answer" condition to persist) in step 545, or it can be configured to play an announcement to the called party that the call was not accepted by the called party 200 (step 543) and finally release the call in step 547.

Referring now to Figure 7, a SETUP message is generated over signaling links from the calling party 100 to originating switch 110 when the calling party dials the called party's number. (See 500, Fig. 6.) This SETUP message contains an alias for the called party number ("called #") which instructs the originating switch 110 to route the call to a special server 120, via any central office intermediate switches 115. (See 505, Fig. 6.) Using standard ISDN procedures, the call is completed to the special server 120. The special server 120 prompts the calling party 100 to enter a message over the established connection. (See 510, Fig. 6.) The calling party 100 enters and sends the text message. (See 515, Fig. 6.) (Again, the calling party can select either a voice or text message, but for this exemplary embodiment, a text message was chosen for illustrative purposes.) This text message is stored in the special server 120 (See 520, Fig. 6) and the call between the calling party 100 and

the special server 120 is placed on hold. (See 525, Fig. 6.) The special server 120 then initiates a call to the called party 200 using standard ISDN procedures, sending the text message as well. The message is sent to the called party 200 by the terminating switch 210 in the DISPLAY information element of the SETUP message. (See 530, Fig. 6.) The special server 120 bridges the connections between the calling party 100 and called party 200, and the text message will then be displayed at the called party cite. (See step 535 Fig. 6.) After the called party 200 answers the call, and the call is established end-to-end (100 to 200). The call now proceeds normally. (See 550 Fig. 6.)

Although in the embodiment depicted in Figure 7, the call is bridged immediately (i.e., with reference to Figure 6, flow continues, from step 530, through step 531, to step 535), an option can be selected to "wait". (Step 531, Fig. 6.) If the "wait" option is chosen, the call will not be bridged, forwarded or released until a user response from the called party has been received (step 532, Fig. 6). A signal flow, corresponding to the process flow for steps 531 to 540 (Fig. 6), along the "WAIT" path, would then be implemented.

In another exemplary embodiment of the present invention, the calling party is the subscribing party and thus can initiate the message transfer on demand. Figure 8 illustrates the ISDN processing flow for the case in which the calling party explicitly designates the call as belonging to a special service by dialing digits to request the message service (i.e., the calling party initiates the message transfer.) Figure 9 presents the detailed message flow for the processing flow illustrated in Figure 8, depicting this embodiment of the present invention. In the embodiment of Figures 8 and 9, the message is assumed to be textual for illustrative purposes, however, as for the other example embodiments, voice messages may equally be used.

Referring to Figure 8, the calling party invokes the message transfer in step 600 by entering a special code or series of digits which are contained in the SETUP message sent over signaling links. In step 605, the originating switch 110 acknowledges the request and prompts the calling party for more information. The calling party 100 in step 610 enters the called party number and the textual message that to be sent. The originating switch 110 will the route the call to the terminating switch 210 of the called party 200, along with the text message, in step 615, using standard ISDN procedures. In this embodiment, the functions performed by the special server 120 in the embodiments of Figures 4 through 7 are performed by the originating switch 110. The terminating switch 210 then delivers the text message to the called party 200 for display in step 620. At this point, the call proceeds normally in step 630.

Referring now to Figure 9, the SETUP message generated by the calling party 100 as in the previous embodiments specifies that the messaging service is being invoked via the calling party's entering a special

code or series of digits. (See step 600 Fig. 8.) The originating switch 110 responds with a SETUP ACKNOWLEDGEMENT requesting more information. (See step 605 Fig. 8.) The calling party 100 then enters the called party number and the textual message that they wish to send. (See step 610 Fig. 8.) This information is packaged and delivered to the originating switch 110 in one or more INFORMATION ("INFO") messages. When all of the information has been received by the originating switch 110, the originating switch 110 generates a CALL PROCEEDING message to the calling party 100, and completes the call using standard ISDN procedures to the terminating switch 210. (See step 615 Fig. 8.) The Initial Address Message ("IAM") contains the text message being delivered in the UII element. The message is sent to the called party 200 by the terminating switch 210 in the DISPLAY information element of the SETUP message. (See step 620 Fig. 8.) At this point, the call proceeds normally. (See step 630 Fig. 8.)

A server function element is required in the present invention. The server function element of the present invention must be able to perform the following functions: (1) terminate multiple telephone connections; (2) place a connection on hold (When a text message is sent in a embodiment which does not utilize a special network server, there is no need to place the call on hold prior to sending the message.); (3) bridge connections; (4) receive and store voice messages; (5) play stored messages over telephone connections; and, (6) retrieve a called party address from a dialed alias. In the example embodiments of Figures 4-7, the server function element was the special server 120. In the example embodiment of Figures 8-9, the server function element was the originating switch 110. An example of the server function element, as utilized in the several illustrative embodiments of Figures 4 through 7 discussed, is AT&T's Conversant™ System. Examples of the originating switch of the embodiments of Figures 8 and 9 which are capable of performing these functions are AT&T's 4ESS™ or SESS™ switches. In other embodiments, the terminating switch 210 or any other similar device in the communication network (i.e., a device having the necessary "intelligence" to perform the above enumerated functions) can be utilized as the server function element.

The processing flow for the server function element of the present invention is shown in Figures 10 and 11 and is described in detail below.

Figure 10 presents the server process flow for a voice message. In step 500, the server function element receives an incoming call destined for the called party 200. In step 502, the server function element accepts the call and prompts the calling party 100 for a message. In step 504, the server function element then accepts the calling party voice message and records or stores it. The calling party is then placed on hold in step 505 and waits for instructions from the calling party. The server function element, in step 506, resolves the called

party alias with the actual address of the called party 200, and in step 508 the server function element places the call to the resolved address of the called party. The flow continues along the "VOICE" path to step 510 where, after receiving an indication that the called party 200 has answered the call (i.e., the connection has been established), the server function element in step 512 plays the stored message for the called party over the newly established connection.

In step 514, the server function element resolves, based on input from the called party, to either accept the call (step 516), or reject the call (step 520). Where the called party has accepted the call (516), the server function element will bridge the call (either connect or forward) in step 518. Where the called party has not accepted the call (520), the server function element will either, at the choice of the called party, do nothing and "Ring Back" (i.e., allow a "ring no answer condition to persist) in step 522, or can be configured to play an announcement to the called party that the call was not accepted by the called party 200 (step 524) and finally release the call in step 530.

Figure 11 presents the server process flow for a text message. In step 700, the server function element receives an incoming call destined for the called party 200. In step 702, the server function element accepts the call and prompts the calling party 100 for a message. In step 704, the server function element then receives the text message from the calling party voice message and records or stores it. The calling party is then placed on hold in step 705 and waits for instructions from the calling party. The server function element, in step 706, resolves the called party alias with the actual address of the called party 200, and in step 708 the server function element then initiates a call to the resolved address of the called party, using standard ISDN procedures, and sends the text message for display to called party 200 as part of the call SETUP message.

In step 710, an option is selected to either "wait" or "bridge" the call.

If the "bridge" option is chosen, the call is bridged immediately in step 735. The call then proceeds normally (step 740).

If the "wait" option is chosen, the server function element resolves in step 714, based on input from the called party, to either accept the call (step 716), or reject the call (step 720). Where the called party has accepted the call (716), the server function element will bridge the call (either connect or forward) in step 718. Where the called party has not accepted the call (720), the server function element will either, at the choice of the called party, do nothing and "Ring Back" (i.e., allow a "ring no answer" condition to persist) in step 722, or it can be configured to play an announcement to the called party that the call was not accepted by the called party 200 (step 724) and finally release the call in step 730.

In another embodiment of the present invention, as in the called party initiated messaging service, in calling

party initiated service the call could be routed to a server function element upon receiving the called party number. The server function element would then prompt the calling party for the message. The message flows for text and voice messages would be similar to those of the called party initiated messaging service. For the illustrative embodiments where the voice message is stored in a server function element as acquired over the voice path established between the server function element and the calling party, signalling messages may be used instead to carry the voice message. Here, the voice message would be digitized at the ISDN phone, INFORMATION messages would carry the voice message into the network, and USR messages would be used to carry the voice message within the network. The called party phone would decode the digitized voice and play the message for the called party.

In alternative embodiments, a packet network may be used to carry the voice conversation, such as an ATM-based B-ISDN, or and Internet-like network, then voice and text messages would be carried between the calling party and network within these packets using procedures similar to those described above.

Although both the calling or called party initiated service in the illustrative embodiments described herein are implemented assuming ISDN equipment, the features of the present invention can also be realized using POTS ("Plain Old Telephone Service"). For POTS implementation, the signalling between the calling and called parties and the networks would be done using DTMF signals.

This messaging service can be combined with other existing services. For example, this service can be combined with call waiting where when a call arrives at a terminating switch for a party that is already active in a call, a textual message is displayed when the tone is generated to the called party indicating that a second call has arrived. If the message is a voice message, the called party will signal by a flash-hook to receive the voice message. This service will allow a subscriber to decide to either interrupt their current call to handle the second call, forward the second call to voice mail, or not answer the second call.

The present invention has been illustrated and described with respect to specific exemplary embodiments thereof. It will be readily understood, however, that the above-described embodiments are merely illustrative of the principles of the invention and are not intended to be exclusive or otherwise limiting embodiments. It should further be understood that the foregoing and many various modifications, omissions and additions may be devised by one skilled in the art without departing from the scope of the invention.

Claims

1. A method for interactively identifying a telephone

- call on a communication network, comprising the steps of:
- terminating a first telephone connection from said calling location; 5
 - receiving a message entered at said calling location;
 - storing said message;
 - relaying said stored message over a second telephone connection to said called location; 10
 - and
 - processing said telephone call based on an input from said called location.
2. The method of claim 1, wherein said relaying step includes bridging said call. 15
 3. The method of claim 2, wherein said bridging said call is immediate.
 4. The method of claim 2, wherein said bridging said call includes waiting for a user response prior to said bridging said call. 20
 5. The method of claim 1, further including placing said first connection on hold. 25
 6. The method of claim 1, further including prompting said calling location to enter a message.
 7. The method of claim 1, wherein said method further includes the steps of dialing of a number of a called location from a calling location, said number comprising an alias and retrieving a called location address from said alias. 30
-
8. The method of claim 1, wherein said method further includes the step of dialing of a number from a calling location, said number comprising an activation code. 40
 9. The method of claim 1, wherein said processing includes bridging said second to said first telephone connection. 45
 10. The method of claim 1, wherein said processing includes forwarding said call to a forwarding location over a third telephone connection.
 11. The method of claim 1, wherein said processing includes accommodation for call waiting. 50
 12. The method of claim 1, wherein said processing includes rejecting said call. 55
 13. The method of claim 12, wherein when said call is rejected, a message is sent back to said calling location informing of said rejection, said call is then
- released.
14. A method for interactive identification of a telephone call placed on a communication network by a calling party at an originating location to a called party at a terminating location comprising the steps of:
 - dialing of a number by said calling party at said originating location;
 - entering a message by said calling party;
 - routing said call from said originating location to said terminating location; and
 - providing said message to said called party at said terminating location to enable said called party to determine processing of said call.
 15. The method of claim 14, wherein said routing includes placing said call on hold.
 16. The method of claim 14, wherein said number comprises an alias containing an address of said called party.
 17. The method of claim 14, wherein said number includes an activation code.
 18. The method of claim 14, wherein said routing includes routing through a network server.
 19. The method of claim 14, wherein said routing includes routing through an originating switch.
 20. The method of claim 14, wherein said routing includes routing through an intermediate switch. 35
 21. The method of claim 14, wherein said routing includes routing through a terminating switch.
 22. The method of claim 14, said method comprises the step of prompting for said entry of said identifying message.
 23. The method of claim 14, wherein said dialed number includes an activation code.
 24. The method of claim 14, wherein said step of entering occurs prior to said step of dialing.
 25. A server function element for interactive identification of a telephone call on a communication network comprising:
 - terminating means for terminating a first telephone connection from said calling location;
 - means for receiving a message from said calling location;
 - means for storing said message;
 - means for relaying said stored message over a

second telephone connection to said called location; and

means for processing said telephone call based on an input from said called location.

5

26. The server function element of claim 25, wherein server function element further includes means for placing said first connection on hold.

27. A system for interactive identification of a telephone call placed on a communication network by a calling party at an originating location to a called party at a terminating location comprising:

means for dialing, by said calling party at said originating location, of a number;

means for entering a message by said calling party;

means for routing said call from said originating location to said terminating location; and

means for providing said message to said called party at said terminating location to enable said called party to determine processing of said call.

15
20
25

30

35

40

45

50

55

FIG. 1

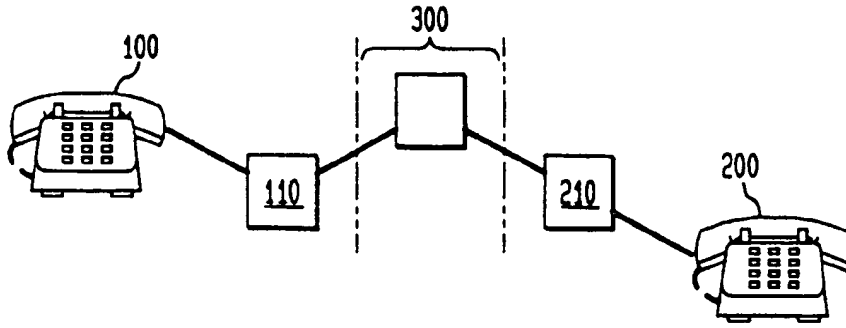


FIG. 2

ISDN CALL ESTABLISHMENT MESSAGE FLOW

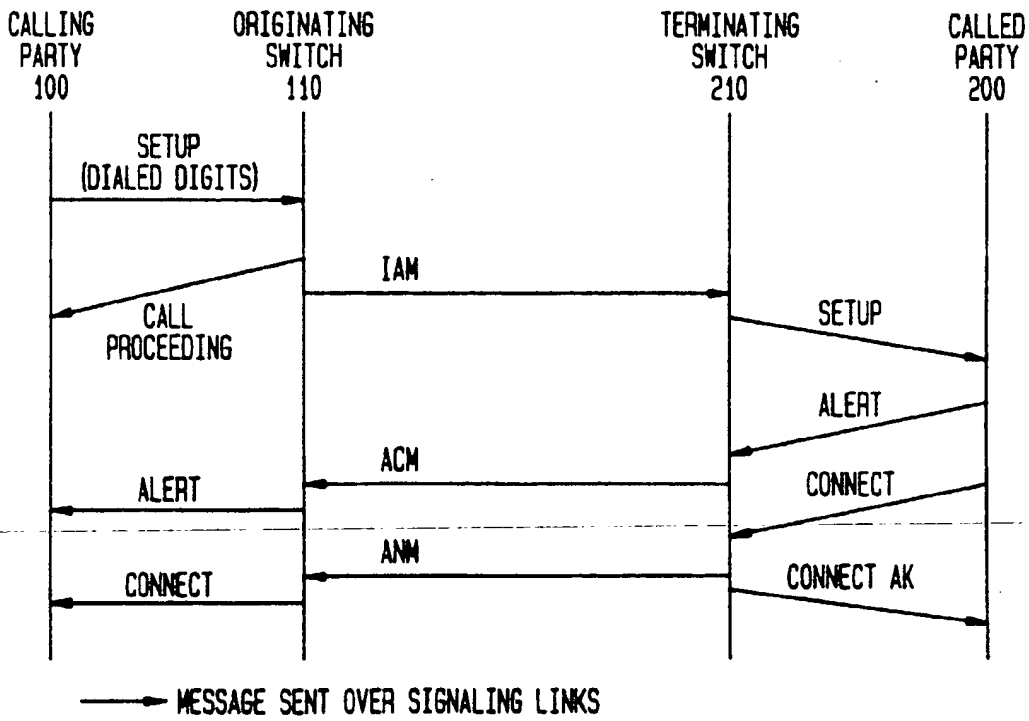


FIG. 3

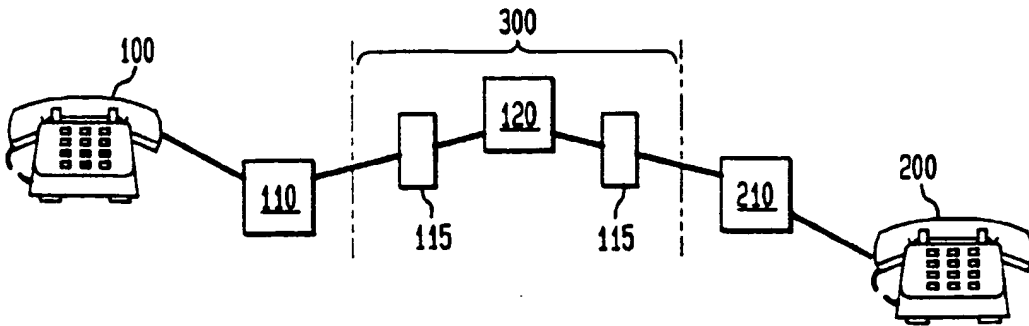


FIG. 4

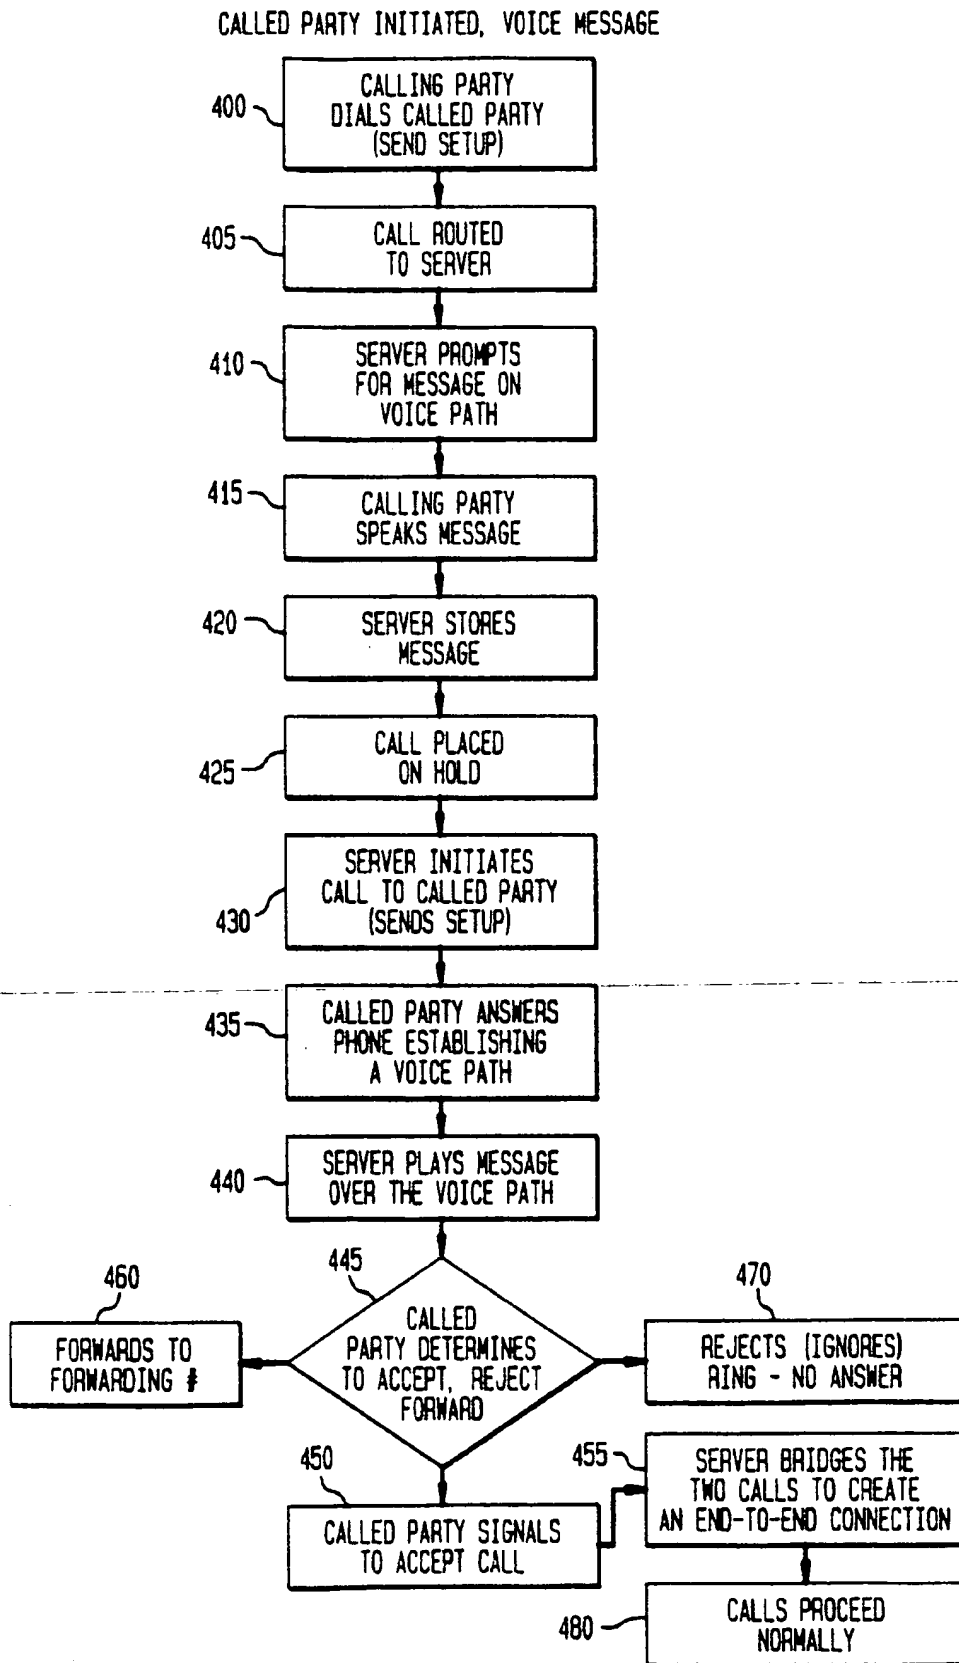


FIG. 6
CALLED PARTY INITIATED, TEXT MESSAGE

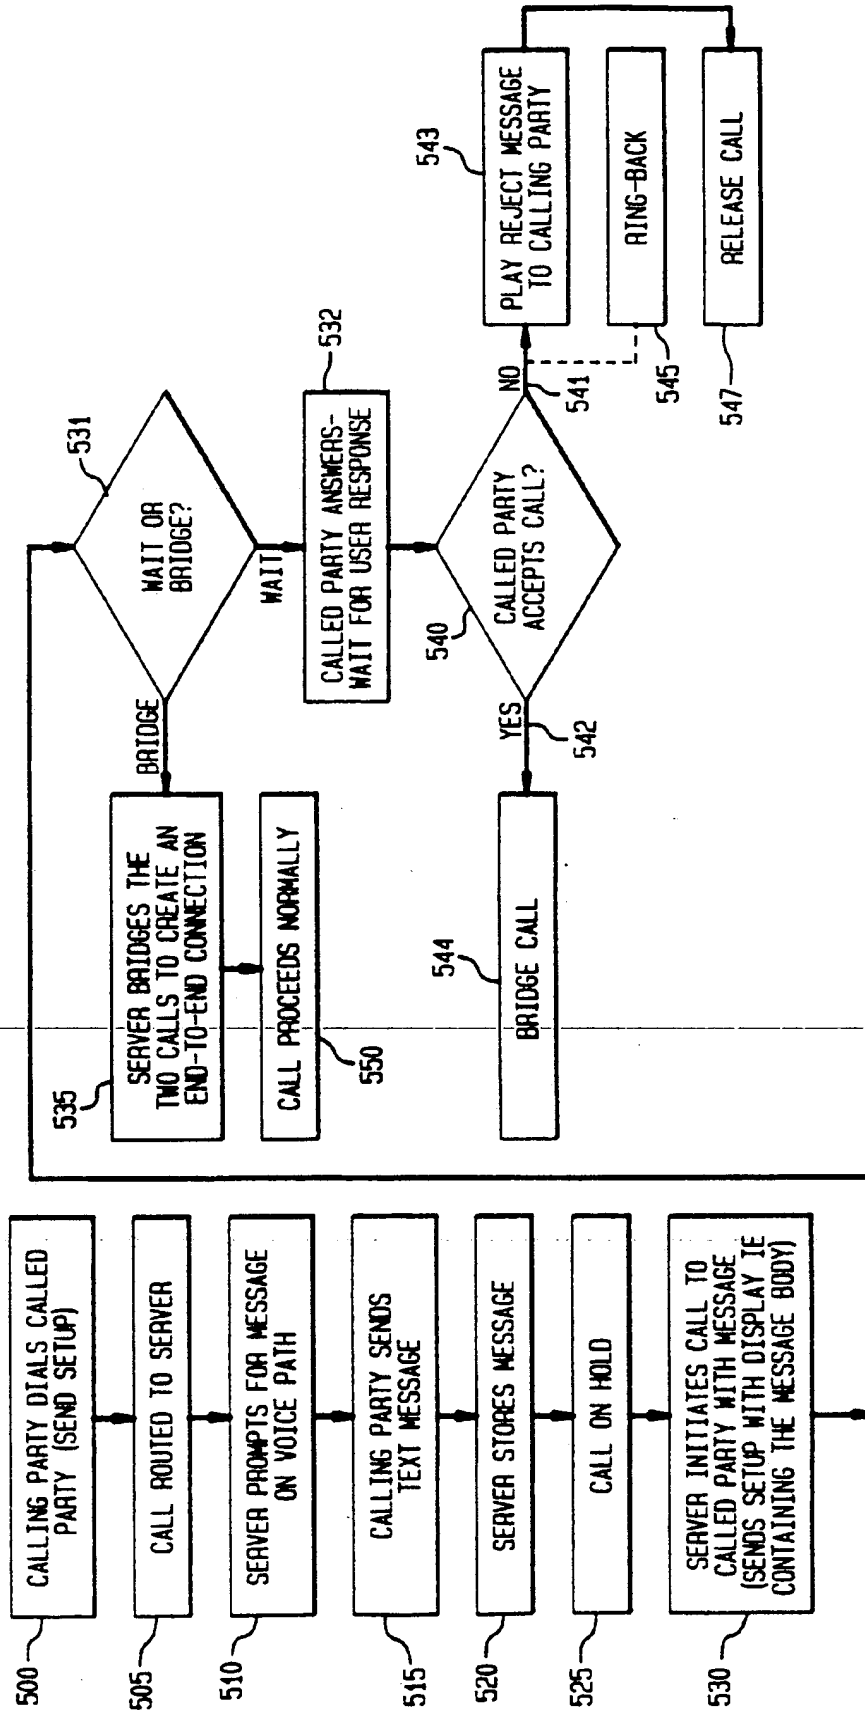


FIG. 7
 CALLED PARTY SUBSCRIBED, SERVER BASED, TEXT MESSAGE

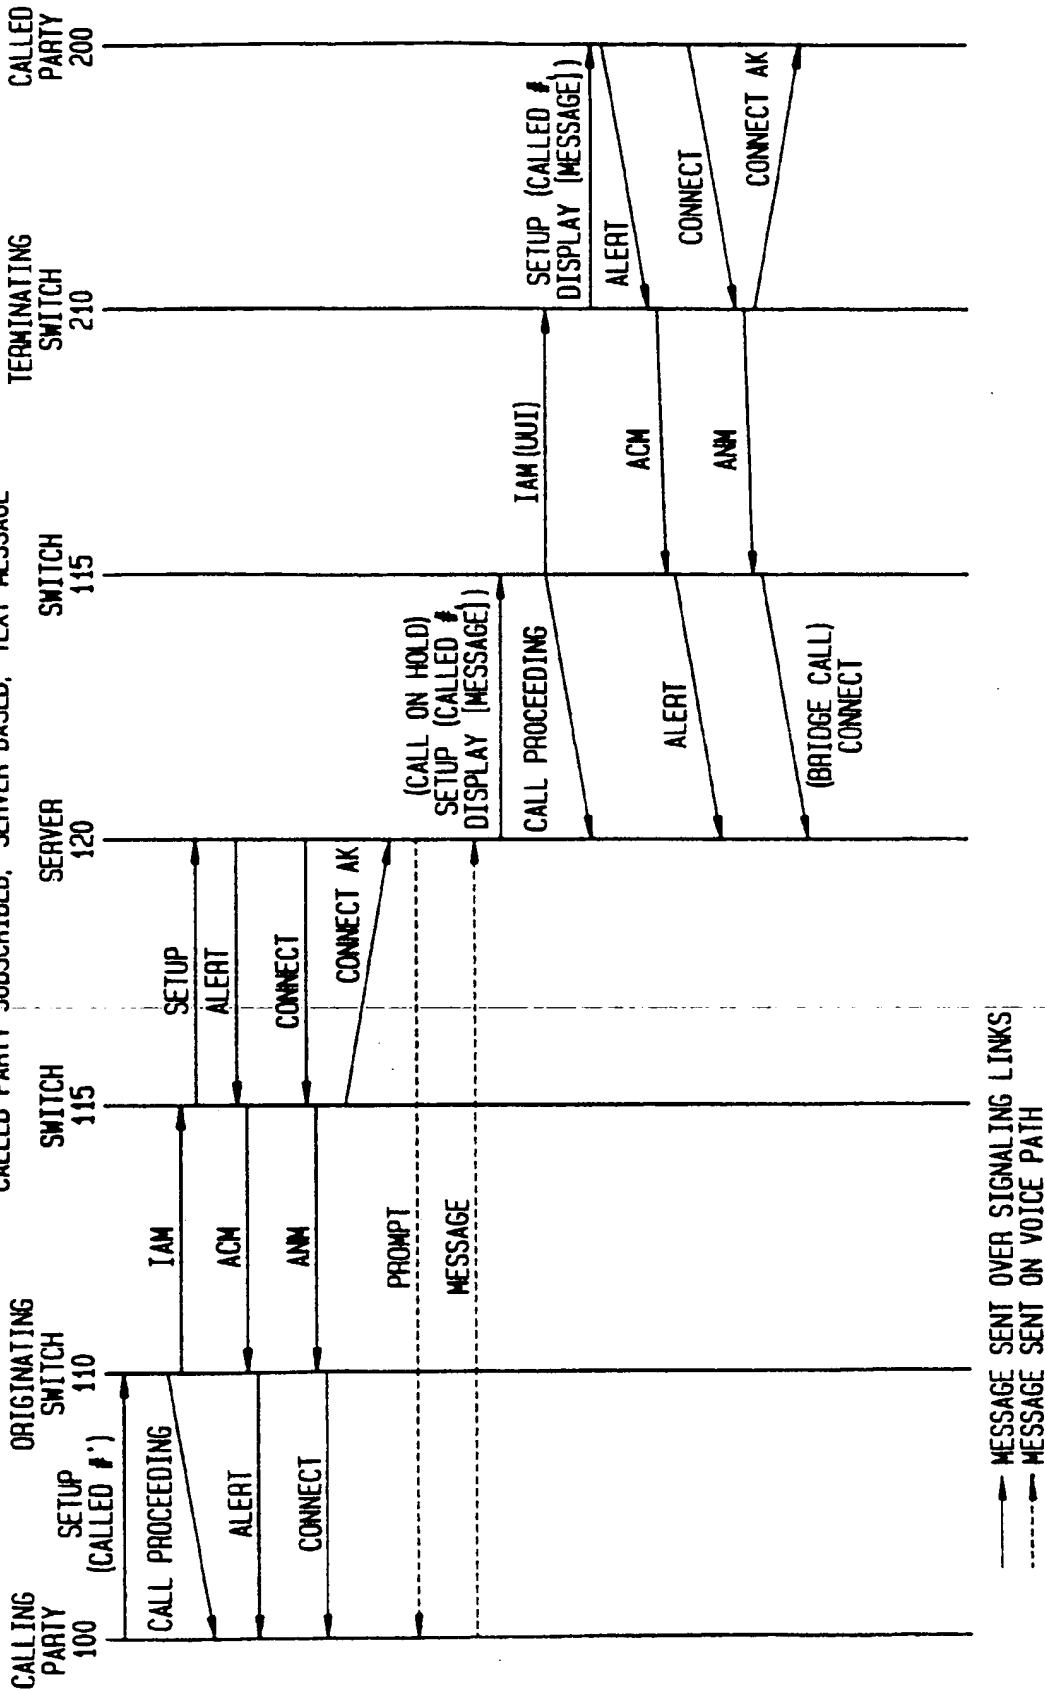


FIG. 8
CALLING PARTY INITIATED, TEXT MESSAGE

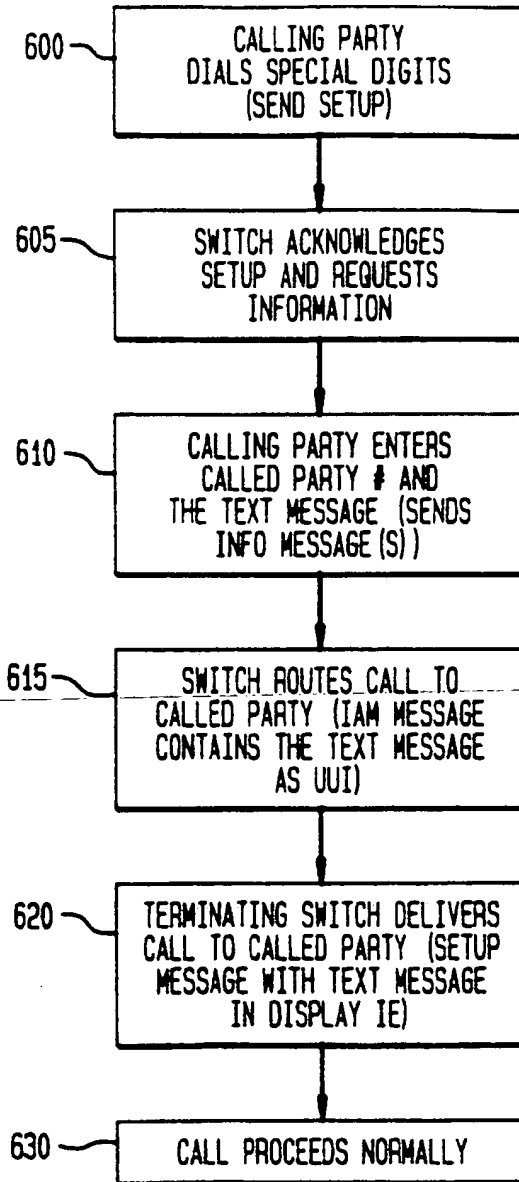


FIG. 9
 CALLING PARTY INITIATED, SWITCH BASED, TEXT MESSAGE

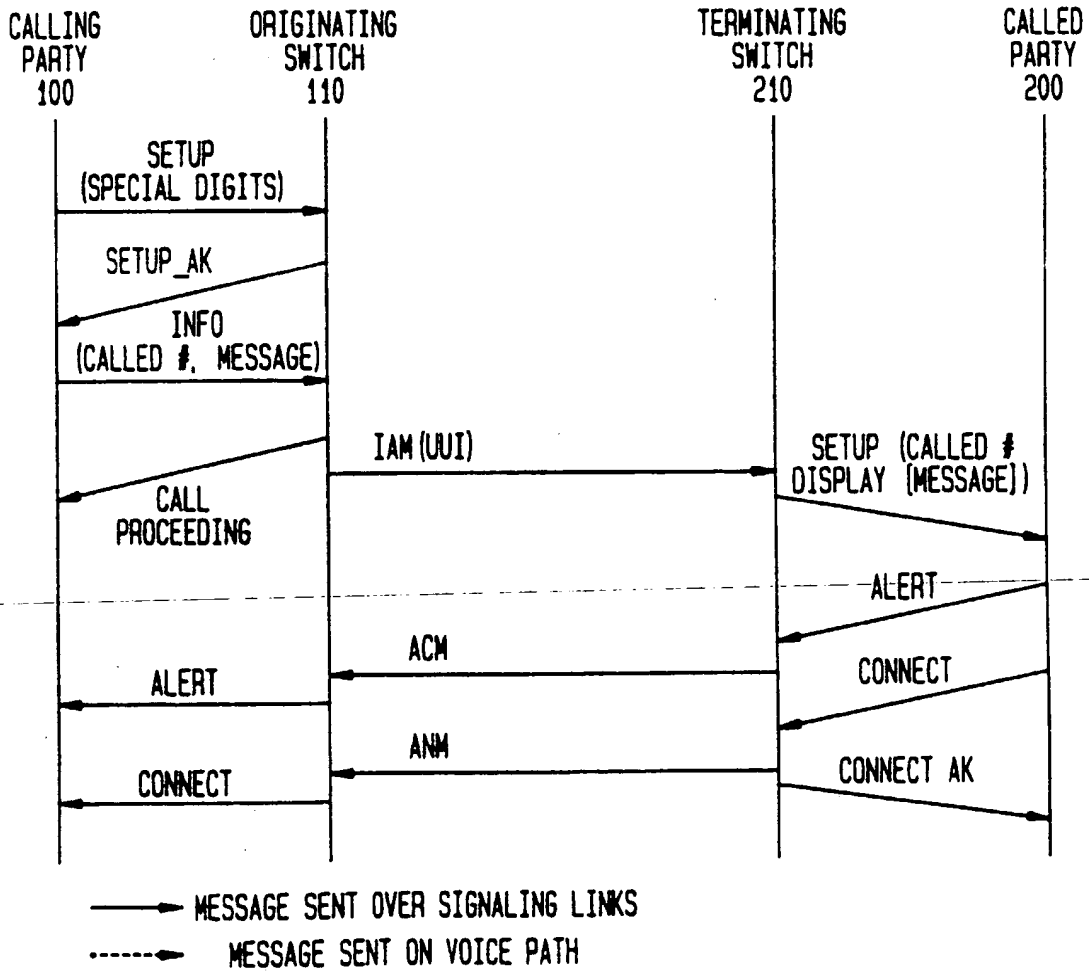


FIG. 10

SERVER PROCESSING FLOW, VOICE MESSAGE


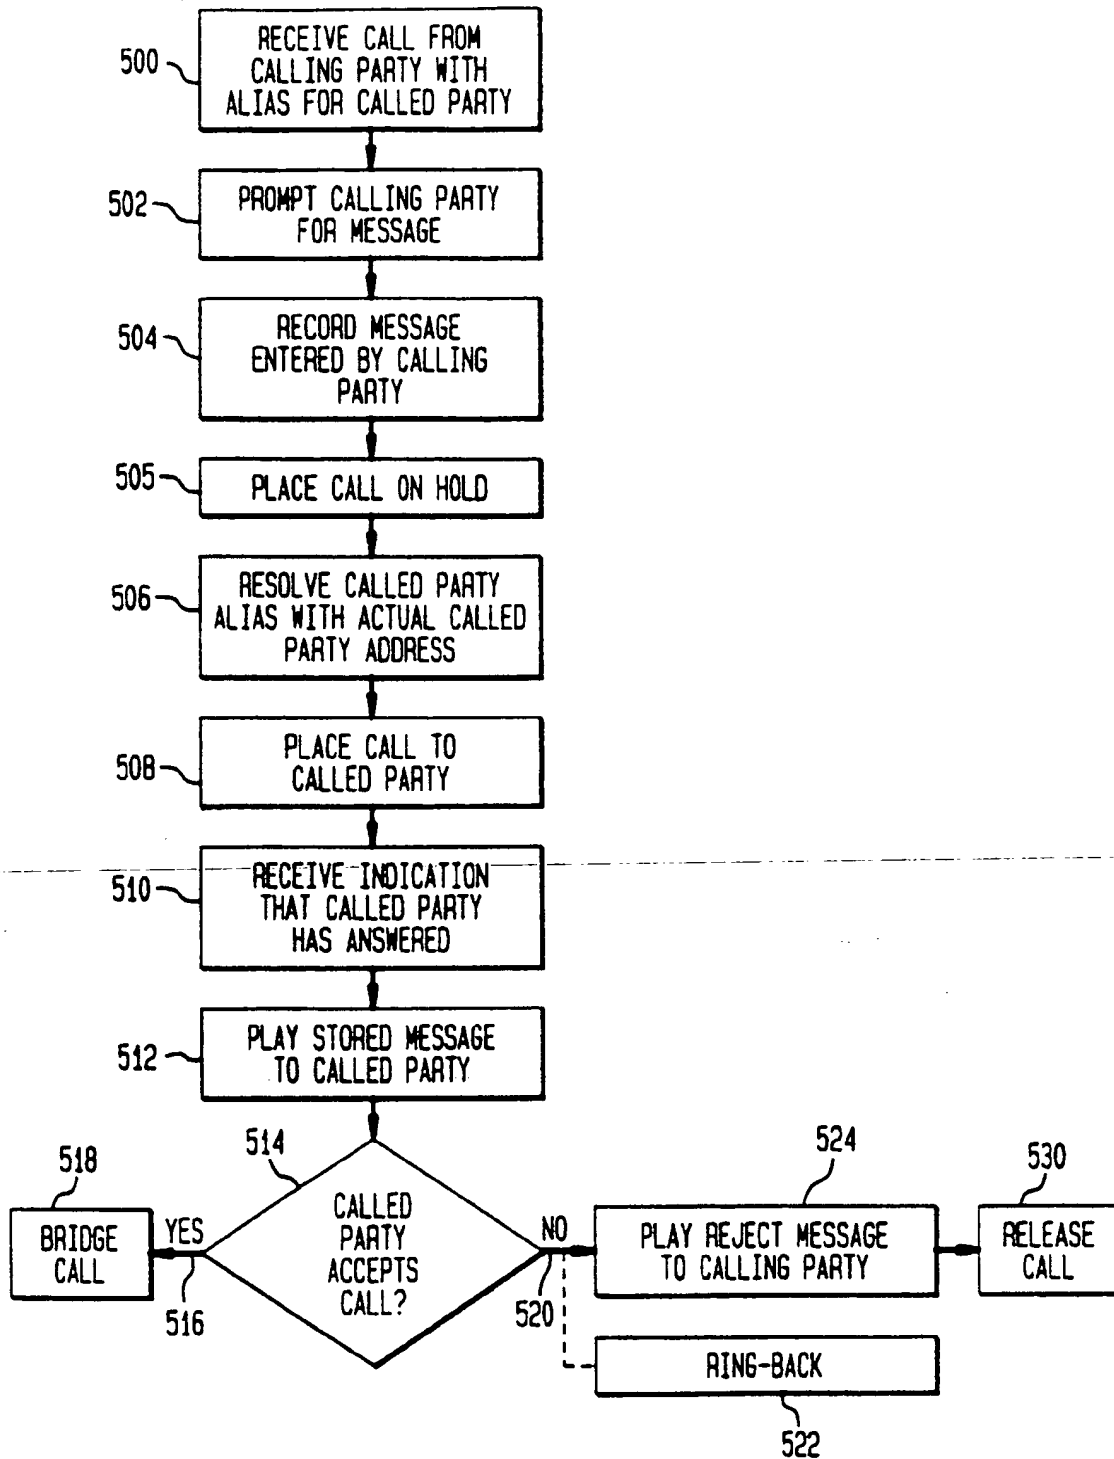


FIG. 11
SERVER PROCESSING FLOW, TEXT MESSAGE

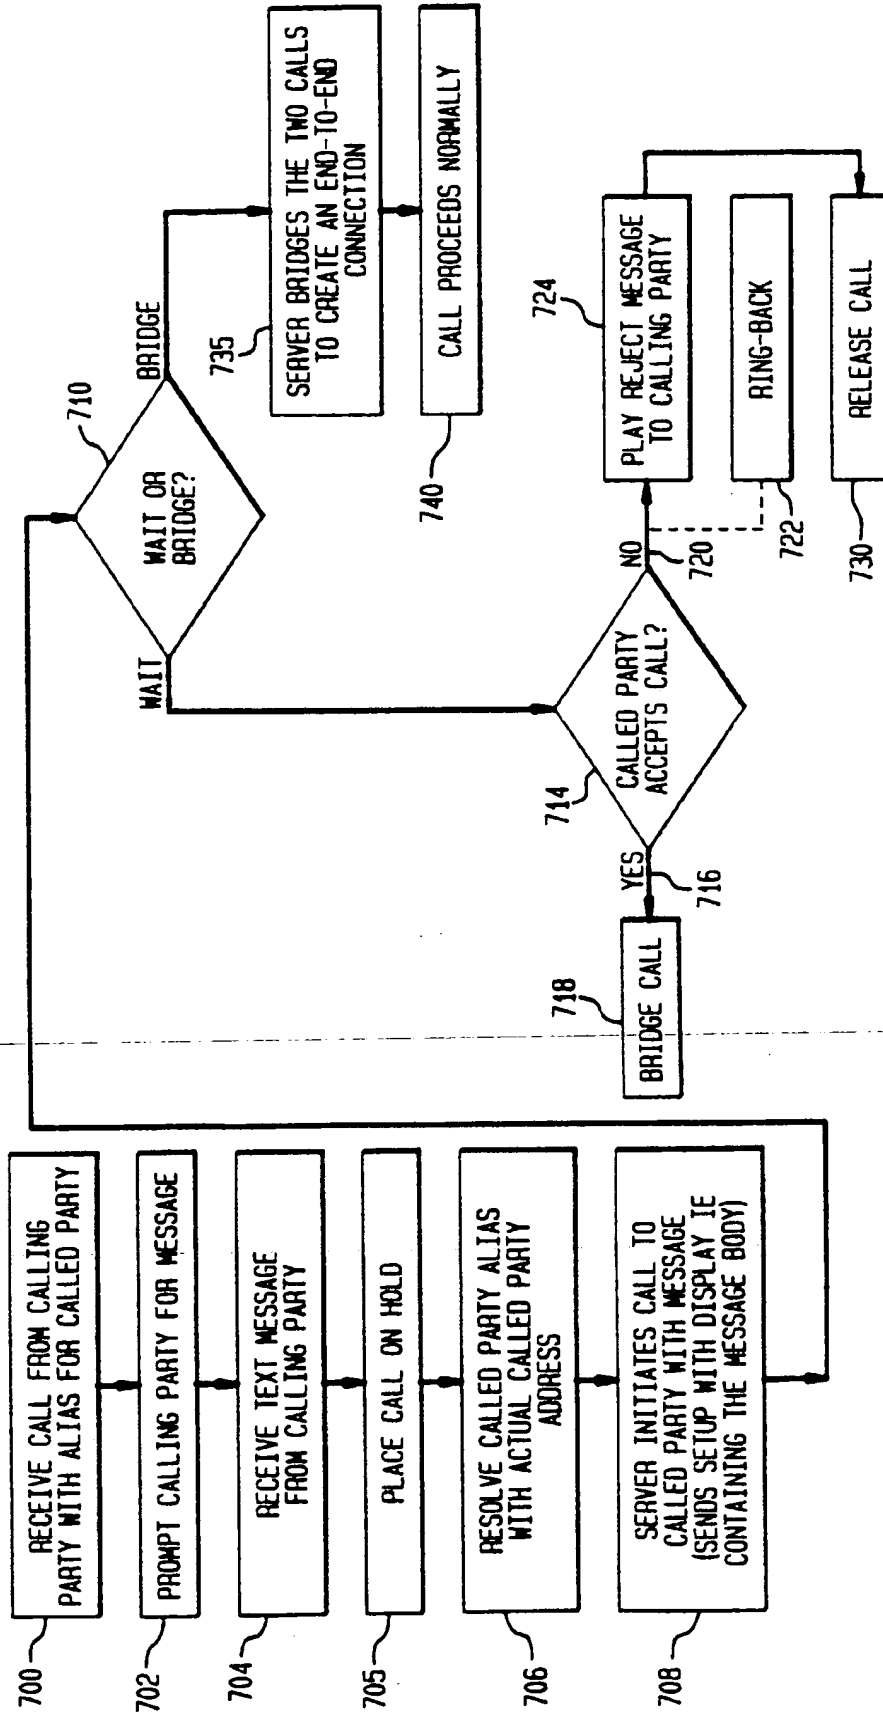

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT OR DRAWING
- BLURRED OR ILLEGIBLE TEXT OR DRAWING
- SKEWED/SLANTED IMAGES
- COLOR OR BLACK AND WHITE PHOTOGRAPHS
- GRAY SCALE DOCUMENTS
- LINES OR MARKS ON ORIGINAL DOCUMENT
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.